




PISTON COMPRESSOR FÜR HEXAN

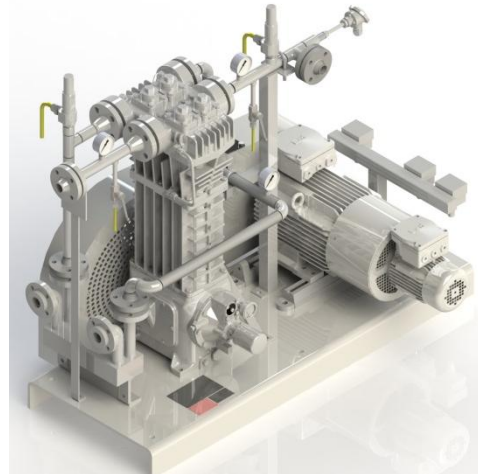

Application: Process technology for a chemical plant

Features:

- Medium: hexane
- 2-stage version
- Heat exchanger as intercooler
- Control of frequency converter
- Complete piping system
- Instrumentation and monitoring of the work process
- Valves according to Pressure Equipment Directive 97/23 / EC, design according to ATEX and Machinery Directive with Declaration of Conformity
- Suitable for installation outside and inside
- Suitable for installation in Ex zone II

Technical Data:

Inlet pressure min	:	0,75 bar
Inlet pressure max.	:	25 bar
Stroke volume	:	13 Nm ³ /h
Engine power	:	5,5 kW
Weight:	:	460 kg



DIN EN ISO 9001



SCC**



DGRL 97/23/EG



ATEX



ASME



EAC

463100/rev1/06-2015/d

